



Direct acting  
solenoid valves with sleeve Ø 9 mm - bases


series **C/**

3 PORT WITH EX CNOMO INTERFACE FOR MODULAR BASES AND VALVES TO ISO 5599/1


Symbol	Function	Controls		Response time at 6 bar (ms)		Flow rate at 6 bar ΔP = 1 bar (Nl/min)	Manual override	Weight (g)	TYPE*
		Pilot	Return	Energized	De-energized				
	3/2 N.O.	Solenoid	Mechanical spring	13	23	36	Manual monostable	60	C/UEASVB
	3/2 N.O.	Solenoid	Mechanical spring	13	23	36	-	45	C/UEASGB
	3/2 N.C.	Solenoid	Mechanical spring	10	25	36	Bistable screw driver slot	45	C/UECSVB
	3/2 N.C.	Solenoid	Mechanical spring	10	25	36	Monostable push button	45	C/UECSPB

\* THE TYPES OF THE SOLENOID VALVES DO NOT INCLUDE COILS /EX Consistent with the ATEX directive II 2GD c T5 T100°C -20°C≤Ta≤50°C ES.:C/UEASVB/EX


C/UECSVB - C/UECSPB

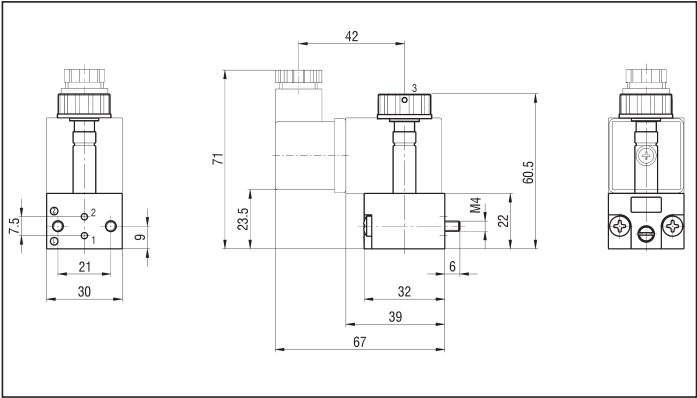

C/UEASVB - C/UEASGB

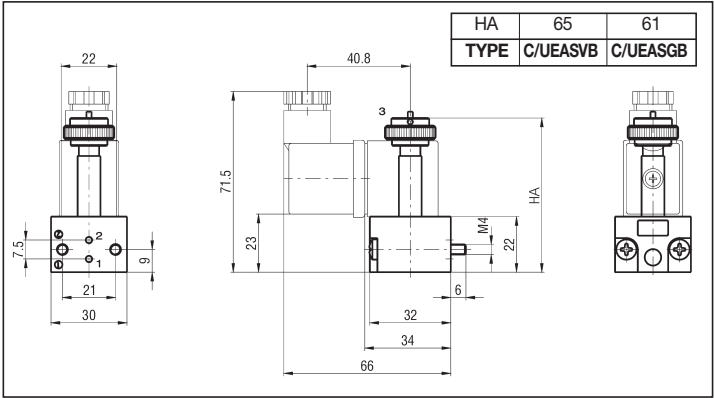

EX CNOMO MODULAR BASE SIDE PORTED G 1/8 - ELPG8S

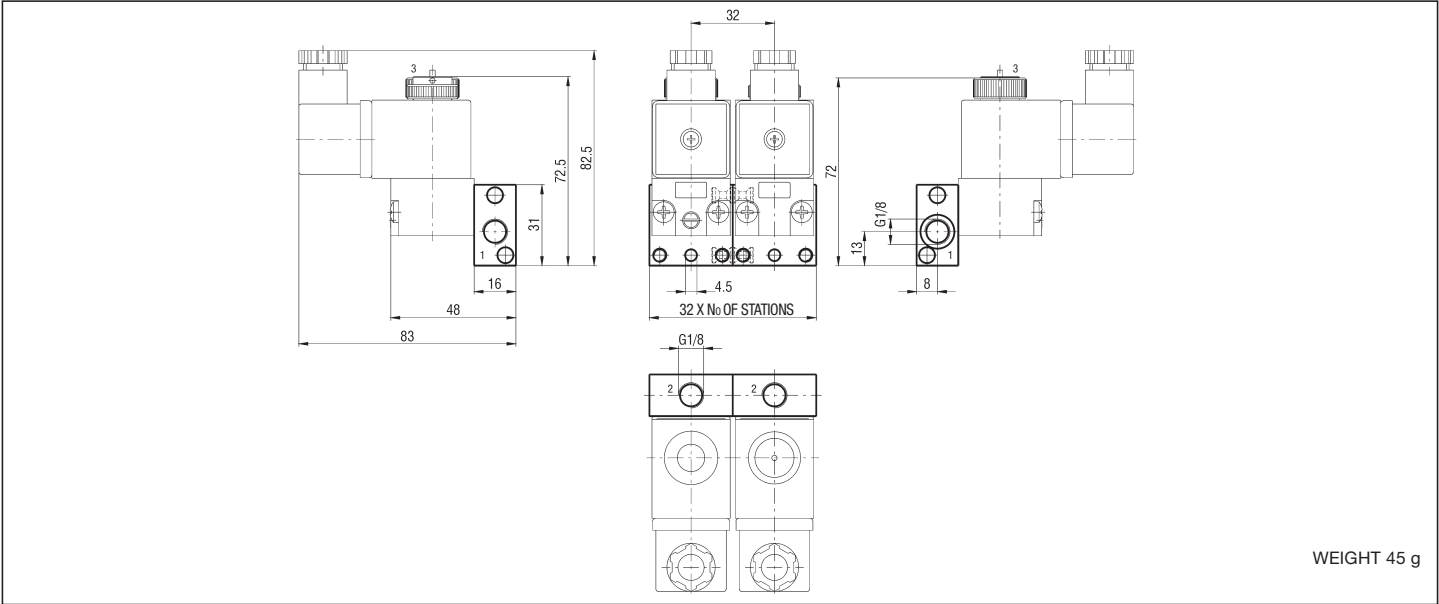

P.S.: Base includes the coupling pin with grains and seals.

HOW TO ORDER A SOLENOID VALVE COMPLETE OF COIL AND BASE  
Example: 3/2 N.O. solenoid valve base mounted (with manual override)  
+ coil 24 V DC **ELPG8S/BAV/USBG/02400**

DESCRIPTION	TYPE
3/2 N.O. + base + coil (with manual override)	ELPG8S/BAV/USBG/voltage
3/2 N.O. + base + coil (without manual override)	ELPG8S/BAG/USBG/voltage
3/2 N.C. + base + coil (with manual override)	ELPG8S/B/USBG/voltage
3/2 N.C. base + coil (with push button manual override)	ELPG8S/BP/USBG/voltage